



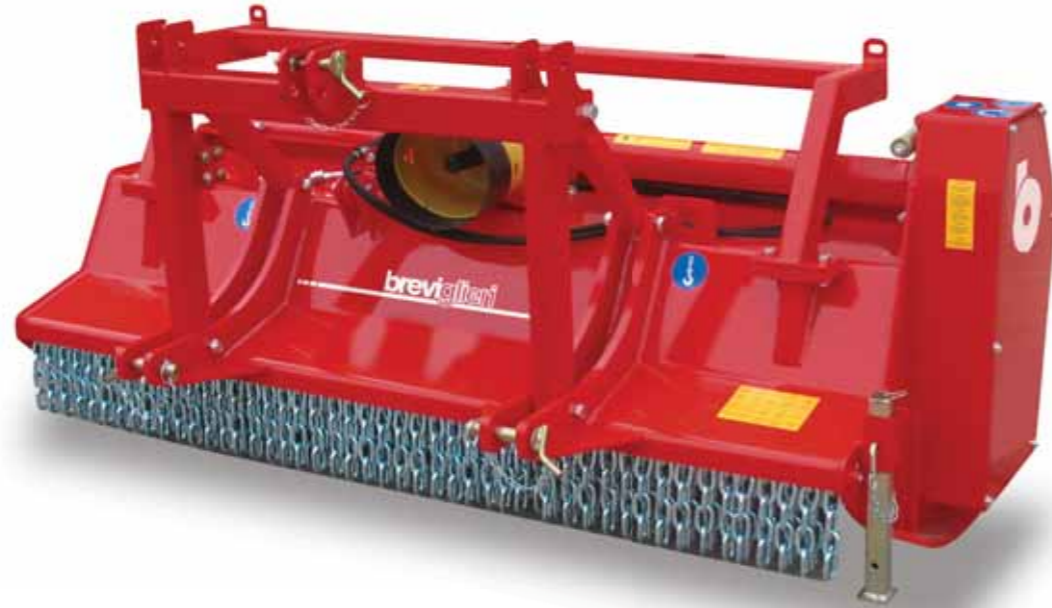





Oak 1

	
STD 540 rpm 60 - 110 HP OPT 1000 rpm 150-255- HP	130 - 230 1000 rpm
cm 130 - 160 - 200 - 230 - 300	
 ø max cm 14	 2-9







Oak 3


STD 1000 rpm 100 - 250 HP
cm 130 - 160 - 180 - 225
 ø max cm 25
 5-10



Oak 2

	
STD 540 rpm 70 - 110 HP OPT 1000 rpm 150-255- HP	1000 rpm
cm 130 - 160 - 180 - 225	
 ø max cm 25	 5-10





HYDRAULIC SIDE SHIFT

- I SPOSTAMENTO LATERALE IDRAULICO
- F DÉPORT LATÉRAL HYDRAULIQUE
- D HYDRAULISCHE SEITEN VERSCHIEBUNG
- E DESPLAZAMIENTO LATERAL HIDRÁULICO

OAK1 - 160									
815	F	F	G	G	815				
	570	F1	G1	G1		1060			
1060	G2	G2	G2	G2	570				
OAK1 - 200									
995	F	F	G	G	995				
	570	F1	G1	G1		1240			
1240	G2	G2	G2	G2	750				



DOUBLE SIDE TRANSMISSION

- I DOPPIA TRASMISSIONE LATERALE
 - F DOUBLE TRANSMISSION LATÉRAL
 - D DOPPEL SEITLISCHE ANTRIEB
 - E DOBLE TRANSMISSION LATERAL
- STANDARD:
OAK 1/300
OAK 3/230-270



SPECIAL ROTOR (FORESTRY)

- I ROTORE SPECIALE FORESTALE
 - F ROTOR SPECIAL (FORESTIER)
 - D SPEZIELLEROTOR (FORST)
 - E ROTORE ESPECIAL (FORESTALE)
- STANDARD:
OAK 1
OAK 2
OAK 3



HYDRAULIC SIDE TRANSMISSION

- I TRASMISSIONE LATERALE IDRAULICA
 - F TRANSMISSION LATÉRAL HYDRAULIQUE
 - D HYDRAULISCHER ANTRIEB
 - E TRANSMISSION LATERAL HIDRÁULICA
- OPTION:
OAK 1

OAK 1 . OAK 2 . OAK 3

MOD.	HP - CV - PS	540		1000		F	FP	SPBX N°	A	B	KG
		•	◦	•	◦						
OAK 1 130	60-110 (150*)	•	◦	26	-	5		136	164	750	
OAK 1 160	70-110 (150*)	•	◦	32	-			163	191	822	
OAK 1 200	80-110 (150*)	•	◦	40	-	6		199	277	913	
OAK 1 230	90-150	-	•	46	-			226	254	1008	
OAK 1 300	150-225	-	•	64	-	10		310	345	1705	
OAK 2 130	70-110 (150*)	•	◦	-	22			129	158	1050	
OAK 2 160	90-110 (150*)	•	◦	-	28			160	188	1200	
OAK 2 180	100-150	-	•	-	32	6		180	209	1299	
OAK 2 225	130-150	-	•	-	40			224	251	1497	
OAK 3 200	100-250	-	•	-	34	6		200	232	1357	
OAK 3 230	130-250	-	•	-	40			230	264	1596	
OAK 3 270	150-250	-	•	-	48	12		271	305	1900	

* With/Con/Avec/Mit/Con PTO 1000 • STANDARD ◦ OPTION
- NOT AVAILABLE / PAS DISPONIBLE / NICHT VERFÜGBAR / NO DISPONIBLE



OAK1/300 - OAK2 - OAK3:
OPENING REAR HOOD WITH IDRAULIC JACKS

- I COFANO APRIBILE CON MARTINETTO IDRAULICO
- F CAPOT ARRIERE OUVRANT AVEC VERINS HYDRAULIQUES
- D OEFFENBARE HAUBE MIT ZYLINDER
- E GATOS HIDRAULICOS PARA ABERTURA DEL CAPO



OAK1 - OAK2 - OAK3:
GEARBOX WITH FREE WHEEL

- I SCATOLA INGRANAGGI CON RUOTA LIBERA
- F BOÎTIER AVEC ROUE LIBRE
- D GETRIEBE MIT FREILAUF
- E CAJA ENGRANAJES CON RUEDA LIBRE



AUTOMATIC BELT TENSIONER

- I TENDICINGHIA AUTOMATICO
- F TENDEUR DE COURROIES AUTOMATIQUE
- D AUTOMATISCHEN REIMENSANNER
- E TENSOR DE CORREAS AUTOMÁTICO



ADJUSTABLE SKIDS

- I SLITTE REGOLABILI
- F PATINS RÉGLABLES
- D VERSTELLBARE KUFEN
- E PATINES AJUSTABLES



BRANCH CUTTER UNIT

- I ABBATTI RAMI (OPTION OAK1)
- F ABBATEUR DE BRANCHES (OPTION OAK1)
- D KIT ASTNIEDERHALTER (AUF WUNSCH OAK1)
- E ESTRUCTURA PARA ABATIR RAMAS (OPCION OAK1)